

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

SL

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C06B	A2	(11) International Publication Number: WO 98/47836 (43) International Publication Date: 29 October 1998 (29.10.98)
(21) International Application Number: PCT/US98/07621 (22) International Filing Date: 20 April 1998 (20.04.98) (30) Priority Data: 08/840,472 18 April 1997 (18.04.97) US (71) Applicant: ATLANTIC RESEARCH CORPORATION [US/US]; 5945 Wellington Road, Gainesville, VA 20155-1699 (US). (72) Inventors: SCHEFFEE, Robert, S.; 5945 Wellington Road, Gainesville, VA 20155-1699 (US). WHEATLEY, Brian, K.; 6309 Swains Road, Marshall, VA 22115 (US). (74) Agent: PRESTA, Frank, P.; Sixbey, Friedman, Leedom & Ferguson, P.C., Suite 600, 2010 Corporate Ridge, McLean, VA 22102 (US).		(81) Designated States: CA, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: A GAS-GENERATIVE COMPOSITION CONSISTING ESSENTIALLY OF AMMONIUM PERCHLORATE PLUS A CHLORINE SCAVENGER AND AN ORGANIC FUEL (57) Abstract This invention relates to gas-generative compositions consisting essentially of ammonium perchlorate with a chlorine scavenger, such as strontium nitrate, barium nitrate, potassium nitrate, or lithium carbonate, the combination being present in an amount of about 30 to about 95 % by weight, up to about 5 % by weight of a binder, up to about 5 % by weight of a burning rate catalyst, together with an organic fuel, such as guanidine nitrate. The fuel is in an amount complementary to the combined weight of ammonium perchlorate, burning rate catalyst, chlorine scavenger, and binder, at an oxidation ratio of 0.90 to 0.98. The invention also includes the method of inflating an inflatable device by generating gas employing the noted composition and a gas generator in which the gas-generative composition is that of the present invention.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A GAS-GENERATIVE COMPOSITION CONSISTING
ESSENTIALLY OF AMMONIUM PERCHLORATE
PLUS A CHLORINE SCAVENGER AND AN ORGANIC FUEL

Technical Field

The instant invention involves pyrotechnics that generate nontoxic combustion products, and that consist of an oxidizer composed of ammonium perchlorate and at least an equivalent weight of a non-halogenated compound of either strontium, barium, or any of the alkali metals, and at least a stoichiometric amount of an organic fuel. Although the composition may be employed to generate gas wherever it is required, such as for life rafts and emergency escape chutes on an airplane, it is primarily utilized to inflate an air bag used as an occupant restraint in a vehicle.

Background Art

Air bags in vehicles are now commonplace to ensure the safety of the occupants in said vehicles. Nonetheless, formulations for generating suitable gases in said air bags are constantly being developed and evaluated with respect to factors such as toxicity, temperature of the gas generated, and the amount of particulates dispersed in the generated gas. Since smoke or gas with a smoke-like appearance may cause the occupants of a vehicle to suspect the possibility of a fire, components that produce visible particulates must be avoided, because of psychological reasons, as well as

the possibility of any adverse physical problems. The composition of the invention disclosed herein is especially characterized by its reduced particulates.

5 In U.S. Patent 3,031,347, slow burning solid composite propellants are disclosed for use in rocket or jet propulsion motors which include ammonium perchlorate and guanidine nitrate.

10 In U.S. Patent 3,739,574, a gas generator is disclosed which may employ propellant mixtures for solid propellant motors including ammonium perchlorate and guanidine nitrate.

15 U.S. Patent 4,948,438 concerns intermolecular complex explosives. The explosive compositions include ammonium nitrate and methyl nitro-guanidine with compounds such as ammonium perchlorate, potassium nitrate and guanidine nitrate being used as melting point depressants.

20 In recently issued U.S. Patent No. 5,538,567, a gas generative propellant mix is disclosed consisting of from about 55% to about 75% by weight guanidine nitrate and from about 25% to about 45% by weight of an oxidizer selected from potassium and ammonium perchlorates. The composition also contains from about 0.5 to about 5.0% by weight of a flow enhancer and up to about 5% by weight of
25 a binder.

Disclosure of the Invention

30 It is a first object of the present invention to provide a gas-generative composition which has utility in inflating devices, particularly occupant restraint devices.

Another object of the present invention is to provide a method of generating a gas employing the inventive gas-generative composition and a gas generator.

35 Yet another object of the invention is to provide a gas-generative composition which results in a nontoxic,

and reduced particulate formulation and one that is essentially smoke-free.

Other objects and advantages of the present invention will be apparent as a description thereof proceeds.

In satisfaction of the foregoing objects and advantages, one aspect of the present invention includes a gas-generative composition comprising essentially three components. A first component is ammonium perchlorate which functions as an oxidizer. A second component is a chlorine scavenger, which is in an amount so that the scavenger theoretically combines with the chlorine in the ammonium perchlorate. The chlorine scavenger is preferably a non-halogenated compound of either strontium, barium or an alkali metal, i.e., lithium, sodium or potassium. The amount of ammonium perchlorate and chlorine scavenger can be related in terms of an acceptable molar ratio of the chlorine scavenger to the ammonium perchlorate. For strontium or barium, the minimum acceptable molar ratio is 0.5. For the alkali metals, the molar ratio is unity. However, higher values can be used to ensure that the chlorine is totally scavenged.

The third component is an organic fuel for complete combustion. Complete combustion includes carbon to carbon dioxide, hydrogen to water and a metal of a metal-containing fuel to its metal oxide. The preferred amount of fuel is slightly in excess of the amount needed for complete combustion so that nitrogen oxide in the combustion product is minimized. Any resulting small amounts of hydrocarbon and carbon monoxide are in nontoxic and nonflammable amounts. The excess fuel is measured in terms of an oxidation or oxygen to fuel ratio defined as the molar ratio for oxygen in a mixture divided by the oxygen required to burn carbon to carbon dioxide, hydrogen to water and a metallic fuel to its

major oxide. The metallic fuel is the surplus metal remaining after the chlorine ions are scavenged. Preferably, the oxygen ratio is less than 1 and, more preferably, between about 0.90 and 0.98.

5 Preferred chlorine scavengers are potassium nitrate, lithium carbonate, strontium nitrate and barium nitrate. A preferred fuel is guanidine nitrate or nitroguanidine.

10 The ammonium perchlorate and chlorine scavenger amounts can range from 30-95% of the total weight of the composition with the organic fuel comprising the balance. The composition can also include a catalyst such as an iron oxide and a polymeric binder.

15 The invention also includes the method of generating a gas by employing the gas-generative composition of the present invention, optionally with suitable other gas generators, for the production of nontoxic, non-flammable, odor-free gas. The method is preferably carried out in a conventional air bag inflator. The formulation is utilized either as a granular mix or as a
20 pressed charge.

Brief Description of Drawings

Figure 1 is a conventional hybrid inflator for a vehicle air bag that may be used to practice the instant invention.

25 Figure 2 is a conventional pyrotechnic inflator for a vehicle air bag that may be used to practice the instant invention.

Best Mode for Carrying out the Invention

30 Figure 1 depicts, in cross sectional view, a hybrid conventional passenger-side inflator (10) for an automobile, comprising a pressure tank (1) charged with an inert gas (3) and a generant container charged with a pyrotechnic of the gas-generative composition (5) of the instant invention. In practice, the initiator (7)

ignites in response to a sensor (not shown) that senses rapid deceleration indicative of a collision. The initiator gives off hot gases that ignite the ignition charge (9) which causes the main generant charge (5) to combust, generating an inflation gas mixture consisting of combustion products and the inert gas. When the pressure in said gas mixture increases to a certain point, the seal disk (11) ruptures, permitting the gas mixture to exit the manifold (13) through the outlet ports (15) and inflate an air bag (not shown). The generant container (17) holds the main generant charge (5). All the charges in the inflation gas mixture are enclosed in the pressure tank (1).

Figure 2 is a drawing of a pyrotechnic generator (20) in which the instant invention may be employed. Since no part of the inflator is reserved for storing inert gas, the device is smaller than its counterpart hybrid inflator. In this figure, there is an initiator (21) that will combust in response to a signal from a sensor (not shown), that generates said signal as a result of a change in conditions, e.g., a sudden deceleration of a vehicle (indicative of a crash), in which the inflator is installed. The initiator (21) gives off hot gases and particles that ignite an ignition charge (29).

The combustion products of the ignition charge (29) flow radially through a plurality of orifices (32) into the combustion chamber (25) igniting the main generant charge (23), whose combustion products comprise the inflation gas mixture. The mixture exits the combustion chamber (25) axially through the exit ports (27), flows through the manifold (33), and exits radially through a plurality of orifices (30). In the absence of initiator activation, but in the presence of a high-temperature environment, such as a burning automobile, then to insure that the ignition charge (29) will be ignited well below

its autoignition temperature (T_{ig}) and well below that temperature where the materials of construction of the hardware begin to weaken, an autoignition propellant (AIP) (31) having a suitably low T_{ig} is used to ignite the ignition charge (29), which then ignites the main generant charge (23). The inflators shown in Figs. 1 and 2 are merely exemplary and the inventive gas-generative composition has utility on all types of devices and/or application where gas-generation is needed.

The gas-generative composition of the instant invention contains (1) ammonium perchlorate (AP), (2) a chlorine scavenger consisting of at least an equivalent weight of a non-halogenated compound of either strontium (Sr), barium (Ba), or an alkali metal (Li, Na, or K), and (3) at least a stoichiometric amount of an organic fuel. Equivalent weight is defined as the amount of scavenger theoretically required to combine with the chlorine in AP, based on valence. Thus, the theoretically minimum acceptable molar ratio of either Sr or Ba to AP is 0.5, and of an alkali metal to AP is unity. In practice, slightly higher values are usually employed to ensure that the chlorine is totally scavenged.

AP is the most industrially important oxidizer in the solid propellant industry, the state of the art of using AP in propellants being as advanced as that of any other ingredient. For example, a great deal is known about the effects of particle size and catalysts on ballistics, and for this reason it is a desirable oxidizer in gas generator propellants. However, its combustion products contain hydrogen chloride (HCl), which is both toxic and corrosive, and can also contain toxic amounts of nitrogen oxides (NOx). Both can be removed by judicious choice of propellant ingredients and propellant stoichiometry.

HCl can be scavenged from the combustion products if the AP is burnt with at least an equivalent amount of a

non-halogenated compound of either strontium, barium, or an alkali metal. This results in the formation of the nontoxic and noncorrosive metal chlorides (i.e. SrCl_2 , BaCl_2 , LiCl , NaCl , or KCl), which can all be condensed and removed inside the inflator. Strontium and barium compounds of interest are the nitrates, carbonates, oxides, and hydroxides. The most interesting alkali metal compounds are the nitrates and carbonates of lithium, sodium, and potassium. The preferred amount of the scavenger compound is usually in excess of that needed to react with the chlorine in AP, in order to ensure complete removal of hydrogen chloride. Strontium, barium, and the alkali metal compounds are preferred because of the superior thermochemical stability of their chlorides in hot combustion products. The lower molecular weight alkaline earth compounds are not of interest because neither CaCl_2 nor MgCl_2 are stable at these conditions (beryllium compounds are not of interest because of their toxicity). Similarly, better known chlorine "getters" such as zinc and copper do not form stable chlorides at these conditions.

Although inorganic fuels are acceptable if they and their combustion products are nontoxic, their combustion products are condensed species. More preferred fuels are organic compounds, which burn to form gaseous combustion products (CO_2 , H_2O , and N_2), which have obvious importance for gas generators. The preferred organic fuels have high oxygen and nitrogen contents, and correspondingly low chemical oxygen demand. This minimizes the amount of oxidizer needed for combustion, and thus the amount of ash (as the metal chloride) in the combustion products. Consequently, these kinds of fuels further increase the gas output of the propellant while reducing its smokiness, which are both important properties for bag inflation. Preferred fuels include oxygenated and/or nitrogen containing compounds such as guanidine, ethylene

5 diamine, urea, tetrazole, urazole, uracil, melamine, cyanuric acid, and the like, and their oxygen-containing and/or nitrogen-containing derivatives (e.g. nitrates, nitramines, carbonates, amines, hydrazides, amides, and the like). Other preferred fuels include chemical foaming agents such as azodicarbonamide. The chlorides of these compounds are also acceptable, e.g. cyanuric chloride, if used with an equivalent weight of one of the scavengers.

10 In addition, binders such as polymeric compounds can be used as fuels. Polyvinyl alcohol, cellulose, and other highly oxygenated resins such as polyethers and polyesters, as well as polyurethanes, polyacrylonitriles, and other nitrogen-containing resins are preferred binders. Chlorinated resins, such as polyvinyl chloride, are acceptable if used with an equivalent weight of one of the scavengers.

15 The preferred amount of fuel is slightly in excess of the amount needed for complete combustion to carbon dioxide and water (or the major metal oxide of inorganic fuels). This in turn results in compositions with a slightly fuel rich stoichiometry, which minimizes formation of nitrogen oxides in the combustion products, in spite of their thermochemical importance at combustion conditions. The resultant compositions necessarily generate small amounts of hydrogen and carbon monoxide in the combustion products, but in nonflammable and/or nontoxic concentrations.

20 The preferred content of AP plus chlorine scavenger is between about 30% to about 95% by weight, preferably, 30 to 60%, more preferably, 38 to 50%, depending on the scavenger and the oxygen demand of the fuel, with a complementary amount of fuel. The preferred oxidation ratio of the resultant mixtures is 0.90 - 0.98, defined as the molar ratio of oxygen in the mixture divided by the oxygen required to burn the carbon to carbon dioxide

25
30
35

and the hydrogen to water, and a metallic fuel to its major oxide, if the metal is not used as a chlorine scavenger. At these oxidation ratios, the concentrations of H_2 and CO are nontoxic and nonflammable, and the concentrations of NOx are nontoxic.

The composition can also include an amount of a catalyst, up to 10% by weight, such as an iron oxide, a chromate, dichromate or the like. Since these catalysts are well known for use with ammonium perchlorate, a further description of the types or amounts is not necessary for understanding of the invention.

Examples

The compositions listed in Table 1 are exemplary of the present invention. They are all slightly fuel-rich, having oxidation ratios (O_R) of about 0.95, defined as the quotient of the oxygen available in the composition divided by the oxygen required for complete combustion. All of these compositions (designated as "COMP" and a number) were simply dry blends of the ingredients, pressed into pellets. Source of the compositions were analyzed by differential scanning calorimetry (DSC) for phase changes and ignition exotherms, and the burning rates of all the pellets were measured in a Crawford bomb.

First, the similarity of melting points of COMPs 449 and 450 indicate possible formation of a solid solution between AP and GN, since they are lower than the melting point/decomposition point of either. All of the compositions burned controllably and reproducibly. With guanidine nitrate, the highest burning rate was measured for COMP 450, which used KNO_3 as the scavenger. It also exhibited a surprisingly low pressure exponent. Red iron oxide increased its burning rate and pressure exponent, as expected. COMP 449, made with Li_2CO_3 , was slower burning, but the addition of one part of red iron oxide

(COMP 451) increased its rate at 4000 psi to the same as that of COMP 450. Without guanidine nitrate, the rates were measurably slower and the exponents higher. The addition of one part by weight of red iron oxide to 100 parts of COMP 546 did not significantly change either the rate or the exponent.

In addition to DSC and burning rate measurements, the pellets were exposed to a standard stability test consisting of exposure to 400 temperature cycles between -40 and +107°. With guanidine nitrate, dimensional and crush strength changed respectively by +4.8 and -76% with lithium carbonate (COMP 449) and by +5.6 and -28% with potassium carbonate (COMP 450).

Table 1

Parameter/Comp ID	449	227	451	450	452	545	546
Composition, WT %							
Guanidine Nitrate	54.0	38.0	53.5	62.0	62.0		
Ammonium Perchlorate	34.5	43.0	34.1	20.1	20.1	42.25	63.65
Lithium Carbonate	11.5	14.0	11.4				20.1
Postassium Nitrate				17.9	17.9	36.75	
Cellulose Acetate		5.0				21.0	16.25
Butyrate							
Red Iron Oxide			1.0		1.0		
Melting Endotherm, °C	159			162			
Ignition Exotherm, °C							
Onset	303			292			
Peak	354			349			
Burning Rate, IN/SEC							
@ 2000 PSI	0.32	0.19	0.39	0.52	0.58	0.28	0.25
@ 4000 PSI	0.52	0.37	0.64	0.63	0.74	0.59	0.46
Pressure Exponent of Burning Rate	0.70	0.94	0.71	0.28	0.35	0.99	0.86
Thermal Cycling Stability: 400 Cycles @ -40/+107°C							
Diameter, IN							
Initial	0.522	0.522		0.522		0.519	0.517
Final	0.547	0.530		0.551		0.519	0.517

5

10

15

20

% Change	+4.8	+1.5	+5.6		0	0
Crush Strength, PSI						
Initial	4104	6569	3198		7429	8571
Final	996	6249	2314		5713	5861
% Change	-76	-4.9	-28		-23	-32

However, these values were improved by use for a binder. Thus, when COMP 449 was modified by addition of 5% by weight of cellulose acetate butyrate binder, (COMP 227) the initial crush strength was increased to 6569 psi, and the dimensional and crush strength changes were reduced to only 1.5 and 4.9%, respectively. Without guanidine nitrate, and with only cellulose acetate hydrate as a fuel, the pellets suffered no dimensional changes during thermal cycling, but did suffer measurable loss of strength (COMP 545 and 546). However, the initial values were so high because of the binding effect of the fuel, that the final values were acceptable. Although, these two propellants had very low burning rates and very high pressure exponents, the selection of the types and amounts of fuel and burning rate catalyst can be used to optimize ballistic and mechanical properties.

The present invention involves a composition for generating a nontoxic, low particulate, non-flammable, odorless and colorless gas, which may be used to inflate automotive air bags and similar inflatable devices. When adjusted to an oxidation ratio of unity, similar compositions have been used to provide a carrier gas for chemical fire suppressants in fire extinguishment systems. It is a further object to provide a composition with improved cycling stability and ballistic properties. The instant invention involves compositions with improved thermal cycling stability over the range of -40 to +107°C and having a decreased pressure exponent.

Additional objects and advantages of the present invention will become readily apparent to those skilled in this art from the following detailed description wherein only the preferred embodiments of the invention are shown and described, simply by way of illustration of the best mode contemplated for carrying out the invention. As will be realized, the invention is capable

of other and different embodiments and its several details are capable of modifications of various obvious respect, all without departing from the invention. Accordingly, the drawings and description are to be
5 regarded as illustrative in nature and not as restrictive.

CLAIMS

1. A gas-generative composition comprising:

a) an amount of ammonium perchlorate:

b) at least one chlorine scavenger in an amount sufficient to combine with chlorine present in the amount of ammonium perchlorate; and

c) at least a stoichiometric amount of organic fuel for complete combustion.

2. The gas-generative composition of claim 1 wherein an amount of oxygen in the composition divided by an amount of oxygen required to convert carbon in the composition to carbon dioxide, hydrogen in the composition to water and surplus metal (metal remaining after all Cl⁻ is scavenged) in the composition to the major oxide of the metal as an oxidizer to fuel ratio ranges between about 0.90 and 0.98.

3. The gas-generative composition of claim 1 wherein the amounts of ammonium perchlorate and the chlorine scavenger together range between about 30 to 95% by weight of the total composition.

4. The gas-generative composition of claim 1 wherein the composition includes an amount of a polymeric binder, the binder acting as part of the fuel.

5. The gas-generative composition of claim 1 wherein the composition includes an amount of catalyst.

6. The gas-generative composition of claim 1 wherein the at least one chlorine scavenger is selected from the group of a non-halogenated compound of lithium, sodium, potassium, strontium, barium and combinations thereof.

7. The gas-generative composition of claim 6 wherein the chlorine scavenger is one of lithium carbonate, and a molar ratio of the amount of ammonium perchlorate to an amount of lithium carbonate as the chlorine scavenger (Li_2CO_3) is about 2:1, the composition comprising a polymeric binder that is cellulose acetate butyrate in an amount up to 5% by weight of the total composition, and a catalyst that is red iron oxide in an amount up to 5% by weight of the total composition, the organic fuel is guanidine nitrate and an amount of oxygen required to convert carbon in the composition to carbon dioxide, hydrogen in the composition to water and surplus metal (metal remaining after all Cl^- is scavenged) in the composition to the major oxide of the metal as an oxidizer to fuel ratio ranges between about 0.90 and 0.98.

8. The gas-generative composition of claim 6 wherein the chlorine scavenger is potassium nitrate and the molar ratio of the amount of ammonium perchlorate to the amount of chlorine scavenger is about 1:1.

9. The gas-generative composition of claim 6 wherein the chlorine scavenger is strontium nitrate and the molar ratio of the amount of ammonium perchlorate to the amount of chlorine scavenger is about 2:1.

10. The gas-generative composition of claim 7 wherein the chlorine scavenger is barium nitrate, and the molar ratio of the amount of ammonium perchlorate for the amount of claimed scavenger is about 2:1.

11. The gas-generative composition of claim 7 wherein the oxygen to fuel ratio is about 0.95.

12. The composition of claim 1 in the form of a granular mix.

13. The composition of claim 1 in the form of a pressed charge.

14. A method for inflating an inflatable device with a nontoxic, reduced particulate gas mixture, comprising the following steps:

- 1) providing an enclosed pressure chamber having exit ports in communication with the inflatable device;
- 2) placing within said pressure chamber the gas-generative composition of claim 1 and a compressed inert gas; and

- 3) igniting said gas-generative composition upon detection by a sensor of the pressure chamber being subjected to a sudden deceleration characteristic of a crash or an autoignition charge to produce said nontoxic reduced particulate gas mixture of combustion products and the inert gas, whereby said gas mixture is substantially instantly generated and conducted through the exit ports of said pressure chamber to an inflatable device.

15. The method of claim 14 comprising the step of providing an occupant restraint device as the inflatable device.

16. The method according to claim 14 wherein the gas-generative composition is in the form of a granular mix.

17. The method according to claim 14 wherein the gas-generative composition is in the form of a pressed charge.

5

18. A gas generator comprising a gas-generative composition within a pressure vessel and an igniter device for igniting the gas-generative composition to generate a gas for inflating an inflatable component, the improvement comprising utilizing the gas-generative composition of claim 1 as the gas-generative composition of the gas generator.

19. The gas-generative composition of claim 8 comprising a polymeric binder that is cellulose acetate butyrate in an amount up to 5% by weight of the total composition, and a catalyst that is red iron oxide in an amount up to 5% by weight of the total composition, the organic fuel is guanidine nitrate and an amount of oxygen required to convert carbon in the composition to carbon dioxide, hydrogen in the composition to water and surplus metal (metal remaining after all Cl is scavenged) in the composition to the major oxide of the metal as an oxidizer to fuel ratio ranges between about 0.90 and 0.98.

20. The gas-generative composition of claim 9 comprising a polymeric binder that is cellulose acetate butyrate in an amount up to 5% by weight of the total composition, and a catalyst that is red iron oxide in an amount up to 5% by weight of the total composition, the organic fuel is guanidine nitrate and an amount of oxygen required to convert carbon in the composition to carbon dioxide, hydrogen in the composition to water and surplus metal (metal remaining after all Cl is scavenged) in the composition to the major oxide of the metal as an oxidizer to fuel ratio ranges between about 0.90 and 0.98.

21. The gas-generative composition of claim 10 comprising a polymeric binder that is cellulose acetate

butyrate in an amount up to 5% by weight of the total composition, and a catalyst that is red iron oxide in an amount up to 5% by weight of the total composition, the organic fuel is guanidine nitrate and an amount of oxygen required to convert carbon in the composition to carbon dioxide, hydrogen in the composition to water and surplus metal (metal remaining after all Cl is scavenged) in the composition to the major oxide of the metal as an oxidizer to fuel ratio ranges between about 0.90 and 0.98.

1 / 2

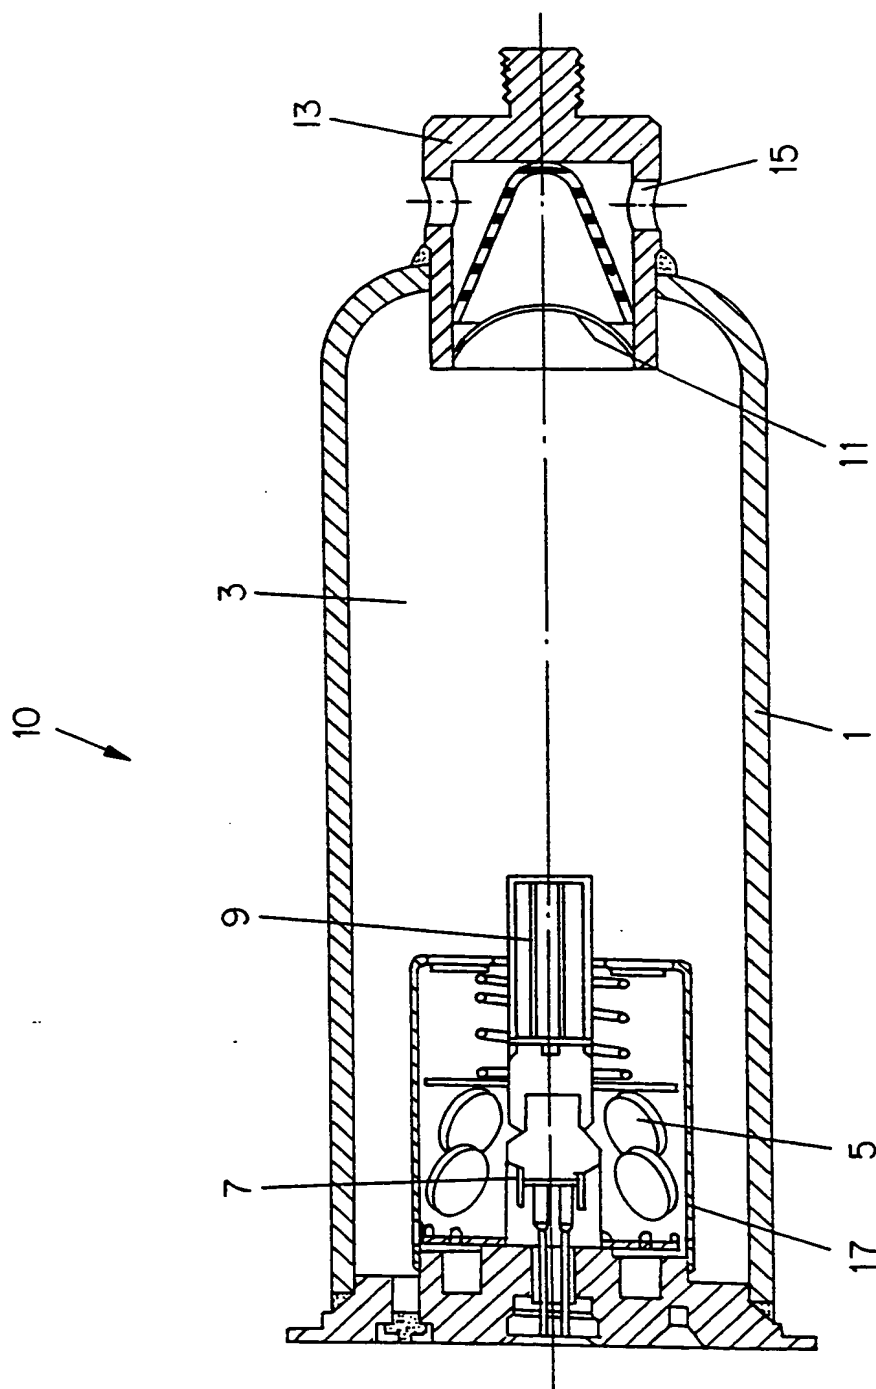


FIG. 1

SUBSTITUTE SHEET (RULE 26)

2 / 2

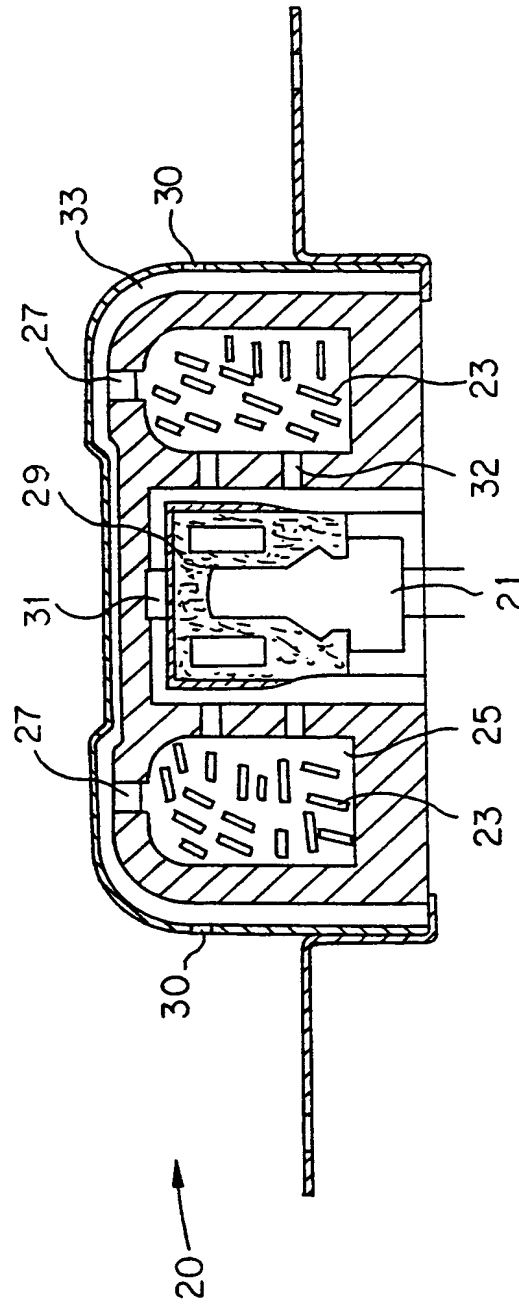


FIG. 2

SUBSTITUTE SHEET (RULE 26)


THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C06D 5/06, C06B 29/22	A3	(11) International Publication Number: WO 98/47836 (43) International Publication Date: 29 October 1998 (29.10.98)
(21) International Application Number: PCT/US98/07621 (22) International Filing Date: 20 April 1998 (20.04.98) (30) Priority Data: 08/840,472 18 April 1997 (18.04.97) US (71) Applicant: ATLANTIC RESEARCH CORPORATION [US/US]; 5945 Wellington Road, Gainesville, VA 20155-1699 (US). (72) Inventors: SCHEFFEE, Robert, S.; 5945 Wellington Road, Gainesville, VA 20155-1699 (US). WHEATLEY, Brian, K.; 6309 Swains Road, Marshall, VA 22115 (US). (74) Agent: PRESTA, Frank, P.; Sixbey, Friedman, Leedom & Ferguson, P.C., Suite 600, 2010 Corporate Ridge, McLean, VA 22102 (US).		(81) Designated States: CA, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims</i> <i>and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 4 November 1999 (04.11.99)

(54) Title: AMMONIUM PERCHLORATE COMPOSITION WITH CHLORINE SCAVENGER

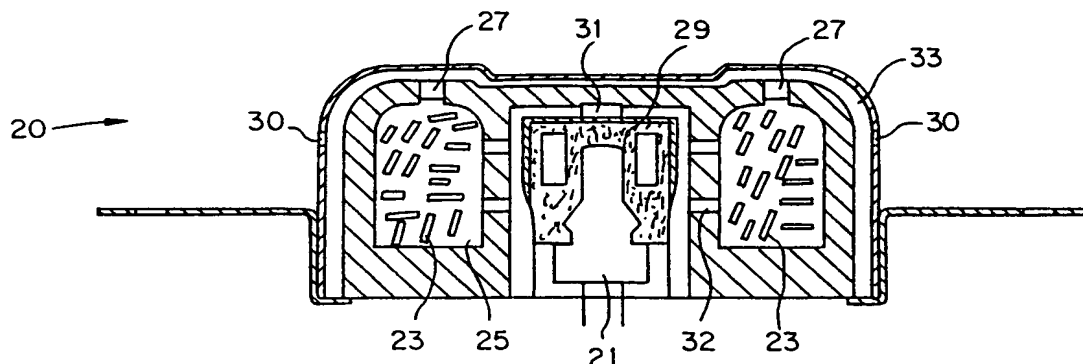**(57) Abstract**

This invention relates to gas-generative compositions consisting essentially of ammonium perchlorate with a chlorine scavenger, such as strontium nitrate, barium nitrate, potassium nitrate, or lithium carbonate, the combination being present in an amount of about 30 to about 95 % by weight, up to about 5 % by weight of a binder, up to about 5 % by weight of a burning rate catalyst, together with an organic fuel, such as guanidine nitrate. The fuel is in an amount complementary to the combined weight of ammonium perchlorate, burning rate catalyst, chlorine scavenger, and binder, at an oxidation ratio of 0.90 to 0.98. The invention also includes the method of inflating an inflatable device by generating gas employing the noted composition and a gas generator in which the gas-generative composition is that of the present invention.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/07621

A. CLASSIFICATION OF SUBJECT MATTER				
IPC(6) : C 06 D 5/06 C 06 B 29/22				
US CL : 102/288,289,290; 149/76				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols)				
U.S. : 102/288, 289, 290; 149/76				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)				
APS Image				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	US 3,031,347 A (PHILIPSON) 24 APRIL 1962 (24.04.62)	1-6,11 14-17		
A	US 3,613,597 A (WARREN ET AL) 19 OCTOBER 1971 (19.10.71) (SEE FIG. 1)	1-6,11 14-17		
A	US 3,739,574 A (GODFREY) 19 JUNE 1993 (19.06.93) (SEE THE CLAIMS)	1-6, 11 14-17		
A	US 3,841,929 A (CRAIG) 15 OCTOBER 1974 (15.10.74) (SEE THE O.G. FIGURE)	6		
A	US 4,948,438 A (PATRICK ET AL) 14 AUGUST 1990 (14.08.90)	1-6,11 14-17		
A	US 5,167,876 A (LEM ET AL.) 01 DECEMBER 1992 (01.12.92)	1-6, 11 14-17		
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.				
<table border="0"> <tr> <td> <p>* Special categories of cited documents:</p> <p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p> </td> <td> <p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>*Z* document member of the same patent family</p> </td> </tr> </table>			<p>* Special categories of cited documents:</p> <p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p>	<p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>*Z* document member of the same patent family</p>
<p>* Special categories of cited documents:</p> <p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p>	<p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>*Z* document member of the same patent family</p>			
Date of the actual completion of the international search		Date of mailing of the international search report		
10 AUGUST 1999		10 SEP 1999		
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231		Authorized officer <i>Deane Goshorn</i> PETER A. NELSON		
Facsimile No. (703) 305-3230		Telephone No. (703) 306-4166		

Form PCT/ISA/210 (second sheet)(July 1992)*

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/07621

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☒ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
1-6, 11 and 14-17
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/07621

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

1. Group I, claims 1-13
2. Group II, claims 14-17
3. Group III, claims 18-21

Also, a specie election was presented from the Markush group of claim 6, claim 7, claim 8, claim 9, claim 10 and claim 16, along with one as to the form of the mix --granular (claim 12) or pressed charge (claim 13).

This totals to 13 inventions, or \$2,780 extra. Applicant, in accordance with the cover sheet, paid for 2 inventions. Therefore the composition and method of inflating were examined, along with first Markush group member.

THIS PAGE BLANK (USPTO)